

General Technical Specifications	
Product Name / Part number	ScanSnap S1500 / PA03586-B005
Scanner Type	Automatic Document Feeder (ADF), Duplex Scanning
Scanning Modes	Color, Grayscale, Monochrome, Automatic (color / grayscale / monochrome Detection)
Image Sensor	CCD (Charge coupled device) x 2 (front x 1 / back x 1)
Light Source	White cold cathode discharge lamp
Optical Resolution	600 x 600 dots per inch (dpi)
Scanning Speed <sup>1</sup> (A4 portrait)	Auto Mode <sup>2</sup> : Simplex or Duplex, 20 pages per minute (ppm) Normal Mode: Color & Grayscale 150 dpi, Monochrome 300 dpi, Simplex/Duplex, 20 ppm Better Mode: Color & Grayscale 200 dpi, Monochrome 400 dpi, Simplex/Duplex, 20 ppm Best Mode: Color & Grayscale 300 dpi, Monochrome 600 dpi, Simplex/Duplex, 20 ppm Excellent Mode <sup>3</sup> : Color & Grayscale 600 dpi, Monochrome 1200 dpi, Simplex/Duplex, 5 ppm
Scanning Range	Normal Mode without Carrier Sheet: A4, A5, A6, B5, B6, Business Card, Letter, Legal and Custom Size. Max: 8.5 x 14.17 in. (216 x 360 mm), Min: 2 x 2 in. (50.8 x 50.8 mm). Automatically recognizes document size. Normal Mode with Carrier Sheet: Use of a Carrier Sheet permits the scanning of A3, B4, Double-Letter and photographs as well as the document sizes listed above. Long Paper Scanning <sup>4</sup> : 34 inches in length (863 mm)
Multi-feed Detection	Ultrasonic Sensor or Length Detection (selectable)
Paper Weight (Thickness)	14 to 34 lb (52 to 127 g/m <sup>2</sup> )
Paper Chute Capacity <sup>5</sup>	Maximum 50 sheets (Letter size at 20 lb or 80 g/m <sup>2</sup> )
Interface	USB 2.0 (USB 1.1 Compatible)
Power Requirement	AC 100V to 240V, 50 / 60 Hz
Power Consumption	Operating Mode: 35W or less Standby Mode: 4.5W or less
Operation Environment	Temperature: 41°F to 95°F (5°C to 35°C) Relative Humidity: 20% to 80% (Non-condensing)
Dimensions (W x D x H) <sup>6</sup>	11.5 x 6.3 x 6.2 in. (292 x 159 x 158 mm)
Device Weight	6.62 lb (3.0 kg)
Environmental Compliance <sup>7</sup>	ENERGY STAR® Compliant / RoHS
Limited Warranty	1 Year Limited Warranty. For full details, visit <a href="http://www.fcpa.fujitsu.com/warranties">www.fcpa.fujitsu.com/warranties</a> or call (800) 626-4686
Service Options	In-warranty Upgrade: Advance Exchange. Post-Warranty: Advance Exchange Plus, Depot Plus, ScanAid Kit, Cleaning and Consumable Kit. For full details on all service programs, visit <a href="http://www.ImagingService.com">www.ImagingService.com</a>

<sup>1</sup>: Scanning speeds may vary due to the system environment used. <sup>2</sup>: Documents measuring 5.8 inches (148 mm) in length or less are scanned in "Best Mode", while other documents are scanned in "Better Mode". <sup>3</sup>: Monochrome 1200 dpi resolution provided by interpolation. <sup>4</sup>: ScanSnap S1500 is capable of scanning documents that exceed A4 size in length. ScanSnap S1500 supports the scanning of longer documents in all modes except in "Excellent Mode". <sup>5</sup>: Maximum capacity varies depending upon paper weight. <sup>6</sup>: Excluding the stacker and other external attachments. <sup>7</sup>: PFU limited, a Fujitsu company, has determined that this product meets RoHS requirements (2005/95/EC).

Software		
Driver <sup>8</sup>	ScanSnap specific driver (Does not support TWAIN / ISIS™) operable with ScanSnap Manager V5.0	
ScanSnap Organizer V4.0 (for PC only)		
CardMinder™ V4.0 (for PC only)		
Adobe® Acrobat® 9 Standard (for PC only)		
ABBYY FineReader for ScanSnap™ 4.0 PC Edition		

<sup>8</sup>: One button image file (JPEG, PDF, and searchable PDF) generation. <sup>9</sup>: Applications listed are not supported on Mac operating systems.



**FineReader**  
OCR



**ADOBE® ACROBAT® 9 STANDARD**



Safety Precautions		
Be sure to carefully read all safety precautions prior to using this product and use this device as described.	Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to the product.	
This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.		

**Fujitsu Computer Products of America, Inc.**

<http://us.fujitsu.com/fcpa>

1250 East Arques Avenue Sunnyvale, CA 94085-4701

(800) 626-4686 (408) 746-7000 [info@fcpa.fujitsu.com](mailto:info@fcpa.fujitsu.com)



**FUJITSU**

System Requirements	
Compatible Operating Systems <sup>11</sup>	Description
	Windows® 2000 Professional
	Windows® XP (32-bit only)
	Windows® Vista™ (32-bit & 64-bit)
	Windows® 7 (32-bit & 64-bit)
ScanSnap Manager V5.0 <sup>12</sup>	Supported <sup>16</sup>
ScanSnap Organizer V4.0 <sup>13</sup>	Supported <sup>16</sup>
CardMinder™ V4.0	Supported <sup>16</sup>
Adobe® Acrobat® 9 Standard <sup>14</sup>	Not Supported
ABBYY FineReader for ScanSnap™ 4.0	Supported <sup>16</sup>
CPU <sup>15</sup>	Intel Pentium® 4 processor 1.8 GHz or higher (recommended: Intel® Core™ 2 Duo Processor 2.2 GHz or higher)
Memory Capacity <sup>15</sup>	512 MB or higher (1GB or higher is recommended)
Disk Capacity	2,920 MB free hard disk space for installation
DVD-ROM Drive	Required for installation
USB Port <sup>15</sup>	USB 2.0 / USB 1.1

<sup>11</sup>: This product supports Microsoft® Windows®. <sup>12</sup>: ScanSnap Manager V5.0 is for use on select Windows operating systems; however, ScanSnap Manager V3.0 is also bundled with this product and supports select Mac operating systems. For complete details, see <http://ScanSnap.fujitsu.com/> <sup>13</sup>: The Windows® Desktop Search function supports Windows Vista™ and Windows® XP. Search functionality for Windows® 2000 Professional is only supported by Adobe® Acrobat® 7.0 and Adobe® Acrobat® 8.0. <sup>14</sup>: Requires Microsoft® Internet Explorer 6.0 or higher. <sup>15</sup>: Scanning speeds may drop if recommended CPU, memory capacity, and USB requirements are not met. <sup>16</sup>: For use with Service Pack 4 or higher. <sup>17</sup>: For use with Service Pack 2 or higher. Compatible with Windows® XP Professional / Home Edition. <sup>18</sup>: Requires Adobe Acrobat 9.2 or higher.

**Rack2-Filer System Requirements (Comes with the ScanSnap S1500 / Rack2-Filer V5 Deluxe Bundled Model only)**

Compatible Operating Systems <sup>19</sup>	Windows® 2000 Professional	Windows® XP	Windows® Vista™ (32-bit & 64-bit)	Windows® 7 (32-bit & 64-bit)
CPU	Intel® Pentium® 4 processor, 1.8GHz or higher (recommended: Intel® Core™ 2 Duo 2.2GHz or higher)			
Memory Capacity	512MB or more (1GB or higher is recommended)	64bit: 2GB or more 32bit: 1GB or more		
Display	800 x 600 pixels or more			
Disk Capacity	System drive: 10MB or more disk space. Installation drive: 450MB or more disk space.*			

<sup>19</sup>: Rack2-Filer V5.0 only supports Microsoft® Windows®.

**Consumables**

Description	Part Number	Remarks
Pad Assy <sup>10</sup>	PA03586-0002	Lifetime: Every 50,000 sheets or one year. (For S1500 and S1500M only)
Pick Roller <sup>10</sup>	PA03586-0001	Lifetime: Every 100,000 sheets or one year. (For S1500 and S1500M only)
Cleaner F1	PA03950-0352	100 ml bottle. (Used to clean Pad Assy and Pick roller)
Cleaning Wipe	PA03950-0419	1 package contains 24 sheets. (Used to clean Pad Assy and Pick roller)

<sup>10</sup>: These recommended lifetimes are for 17 lb (64 g/m<sup>2</sup>) A4 documents, therefore, appropriate replacement lifetimes may vary with use of other document types.

**Included items**

- 1 USB cable (2.0)
- 1 AC adapter
- 1 AC cable
- 1 ScanSnap CarrierSheet
- 1 Adobe Acrobat 9 Standard DVD-ROM
- 1 Getting Started
- 1 Safety Precautions
- 1 Set-up DVD-ROM

**Options**

Description	Part Number	Remarks
ScanSnap Carrier Sheets	PA03360-0013	Qty 5 (Intended for ScanSnap S1500, S1500M, S510, S510M, S500, 500M, & fi-5110EOX2)
ScanSnap Bag	PA03951-0651	Intended for ScanSnap S1500, S1500M, S510, S510M, S500, S500M & fi-5110EOX Series



**ScanSnap**

**FUJITSU**

©2010 Fujitsu Computer Products of America, Inc. All rights reserved. Fujitsu and the Fujitsu logo are registered trademarks of Fujitsu Limited. Adobe and Acrobat are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft, SharePoint, Windows and Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. ISIS is a registered trademark of Pixel Translations, a division of Captiva Software Corporation. VRS is a registered trademark of Kofax Image Products, Inc. ABBYY FineReader are trademarks of ABBYY Software House. As an ENERGY STAR® Partner, Fujitsu Ltd. has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a U.S. registered trademark. All other trademarks are the property of their respective owners. All statements herein are valid only in the U.S. for U.S. residents, are based on normal operating conditions, are provided for informational purposes only, and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. Fujitsu Computer Products of America, Inc. reserves the right to modify at any time without prior notice these statements, our products, their performance specifications, availability, price and warranty, post-warranty and service programs. Printed in the U.S.A. Qty. 3M DS38601109


# Breaking through the paper barrier.

## Easily transform paper with the touch of one button


Organizing with the ScanSnap S1500 happens at the touch of a single button. All this intelligent technology working behind the scene ensures your PDF or JPEG files look their best automatically.




### Blank Page Detection

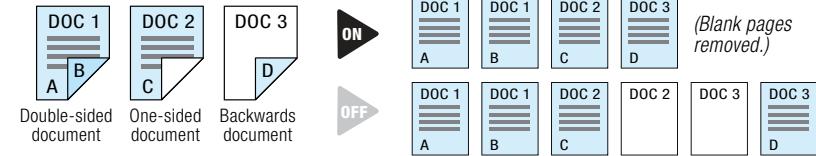

### NEW Intelligent Auto Color Detection

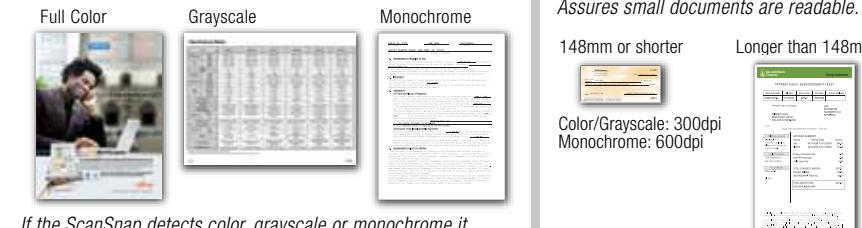

### Auto-Size Detection

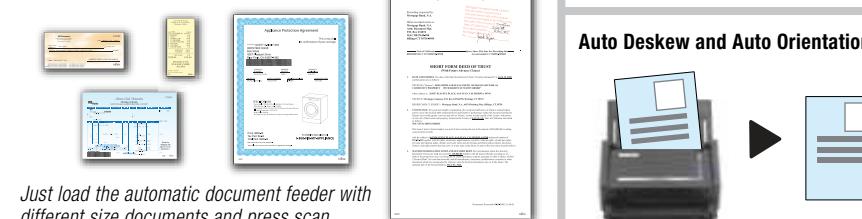

ScanSnap complements any setting, whether resting elegantly on the desk at home or serving dutifully in the corporate office.

## Scan business cards to large A3 documents



### ScanSnap Carrier Sheets

The included carrier sheet allows ScanSnap S1500 the flexibility to digitize large double-letter size documents (A3/B4), photographs, as well as magazine and newspaper clippings. Carrier sheets can be scanned in succession or mixed in with paper documents.



Letter


A3/B4

Clippings


Irregular shapes

### NEW Intelligent Paper Feed Detection

ScanSnap S1500 is equipped with an ultrasonic multi-feed sensor to ensure documents are scanned as intended and data is not lost.



The ScanSnap S1500 provides Windows® users an effective way to greatly reduce paper clutter, storage space, and security risk associated with unmanaged paperwork at home or office. Even better, documents

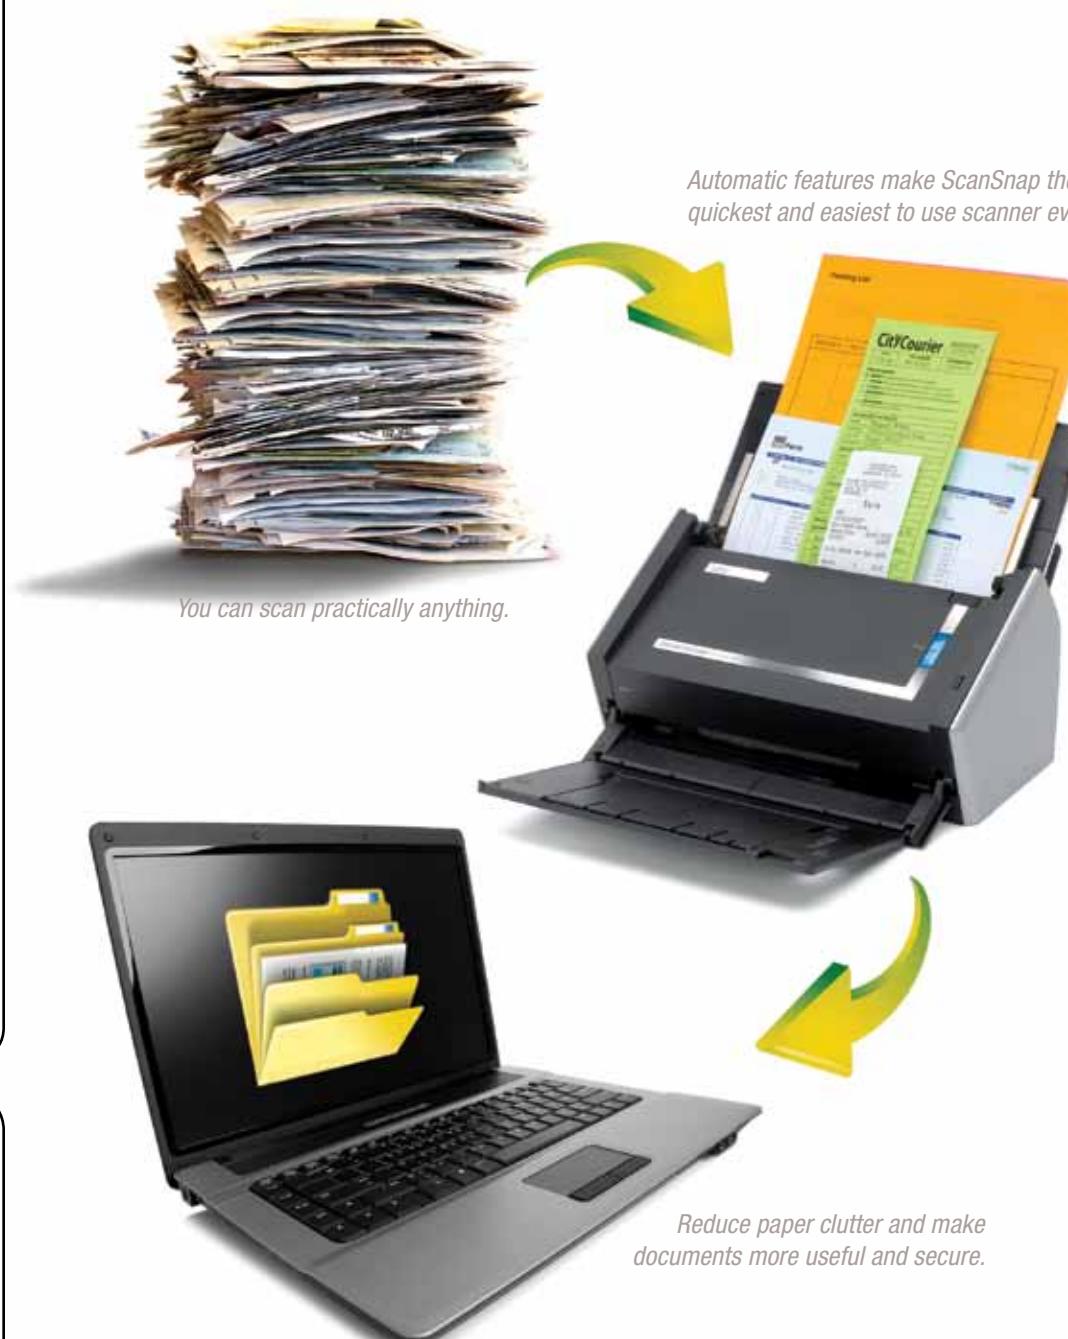

<http://us.fujitsu.com/scansnap>

scanned by ScanSnap take on a higher level of accessibility and usefulness once liberated into the digital realm. Find out how others are freeing up time, space and even money. Visit <http://us.fujitsu.com/scansnap>.


## Quick Menu provides ad-hoc flexibility

Operators can quickly access all the powerful features of ScanSnap from the centralized Quick Menu. Just scan and choose a function to quickly transition from one scanning intention to another. \*Quick Menu for Windows® shown

### ScanSnap Quick Menu



## Bundled Software



**ScanSnap Organizer organizes and manages scanned documents**

- Users can store, manage, and view PDF and JPEG files created by ScanSnap.
- Searchable PDF: Perform post-scan OCR on documents scanned by ScanSnap S1500 immediately or when computer is idle.
- Keywords: Add and search on keywords from PDFs created by ScanSnap S1500.

**NEW Intelligent Cropping:** ScanSnap S1500 can automatically crop out sections outlined with a standard highlighter pen.

**NEW Intelligent Indexing:** Add keywords to a PDF automatically by highlighting text on documents before scanning.

**CardMinder™ efficiently organizes business card information**

- ScanSnap S1500 quickly scans business cards, captures both sides simultaneously, extracts the contact information, and places it into an editable database.
- CardMinder can recognize several different languages and provides export to Outlook Express, Excel, and other contact managers.

**ABBYY FineReader for ScanSnap™ 4.0 creates Microsoft® Word, Excel®, and PowerPoint® files**

With ScanSnap S1500, users can create editable documents by scanning directly into Word, Excel, and PowerPoint. \* Generated images and text may vary from the original.

**Adobe® Acrobat® 9 Standard creates Searchable and Editable PDF files**

- With Adobe® Acrobat® 9 Standard, users can move beyond merely "seeing" and "printing" PDF documents to searching and editing them however they like.
- Adobe® Acrobat® 9 Standard supports password protection and digital ID creation, ideal for safeguarding personal and confidential information on PDF files.

**Rack2-Filer V5.0 available with ScanSnap S1500 Deluxe Bundle**

- Feature-rich scanning and digital archiving application.
- Allows content to be scanned directly into Rack2-Filer from ScanSnap.
- Virtual desk (Work Area) allows users to organize and disseminate scanned files quickly and efficiently.
- Ultra-intuitive user interface incorporates realistic looking binders and cabinets.
- Easy-Flip technology allows users to interact with their scanned content with complete ease.

\*Full license provided with ScanSnap S1500 Deluxe Bundled Model only (PN: PA03586-B015)